



Energy Saving









Comfortable



Recyclable




Intelligent

www.clingac.com



marketing@clingac.com

(+86 371 8533 5504





Technical Data

Cooling Capacity(kcal/h)	28000	
Heating Capacity(kcal/h)	32000	ð
Evaporator Airflow(m³/h)	6000(6pcs)	
Condenser Airflow(m ³ /h)	10000(5pcs)	ð
Compressor Displacement(m³/h)	10.9	
Refrigerant	R744	4
Max Power Consumption(A)	95	
Size(mm)L*W*H	3500*2000*345	
Application(M)	11-13	2

IATF 16949

Environmentally Friendly

Using natural CO2 refrigerant, (ODP=0, GWP=1) has good safety, non-toxic, and nonflammable.


- Stronger Environmental Adaptability The fully enclosed special frequency conversion compressor is used to adapt to lower ambient temperature, and can operate in the ambient temperature range of -30°C~ 40°C.
- High Energy Efficiency At an ambient temperature of -10°C, the COP of the heating efficiency is about 30%.

More Intelligent

Independently developed heat pump air conditioning control system, combined with product characteristics to achieve high efficiency and safety dual control, system defrost control, with monitoring and predictive operation and maintenance capabilities.

More Reliable

Using safe and reliable pressure relief valve, combined with pressure control, to achieve multi-level protection for system product safety.

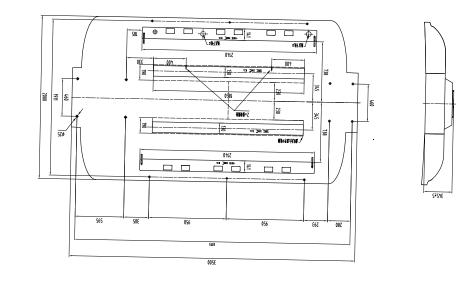

E-MARK

Drawing





EMC

Grade









Van