

CM160-S

Compact Rooftop Bus AC



Energy Saving



Safety



Light Weight



Comfortable



Recyclable



Intelligent

www.clingac.com

CM160-S




Technical Data

Cooling capacity(kcal/h)	14000
Power consumption(24V)	50A
<i>Power consumption(12V Optional)</i>	<i>100A</i>
Evaporator air flow(m ³ /h)	3200
Condenser air flow(m ³ /h)	4000
Fresh air(m ³ /h)	800
Size (mm) L*W*H	2200*1360*215
Weight(kg)	96
Refrigerant	R134a
Appliable(m)	6
Compressor	TM 31

- ✔ Front windward design:
Micro-channel heat exchanger
- ✔ 100% DACROMET anti-corrosion coated coil
suitable for harsh environment
- ✔ LFT-D Structure:
ultralight, consistent,recyclable and rigid
- ✔ Rubber and thermal insulation materials:
environmentally friendly
- ✔ Compressor Brand:VALEO,ALLKO(optional)



Drawing

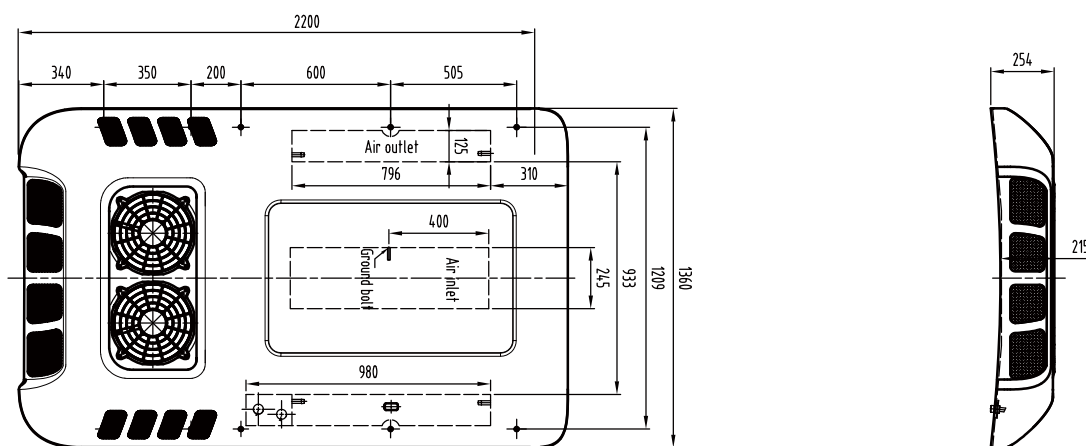

(NOTE: Size for reference only)



Van



City Bus

