

PZD-V

Compact Rooftop Bus AC



Energy Saving



Safety



Light Weight



Comfortable



Recyclable



Intelligent

www.clingac.com

PZD-V




Technical Data

Cooling Capacity(kcal/h)	24000
Max Power Consumption(A)	60
Evaporator Airflow(m ³ /h)	4000(4pcs)
Condenser Airflow(m ³ /h)	6000(3pcs)
Compressor Displacement(CC)	550
Refrigerant	R134a
Weight(kg)	140
Size (mm) L*W*H	2590*1715*205
Application(m)	9-10

- Front windward design:
Micro-channel heat exchanger
- 100% DACROMET anti-corrosion coated coil suitable for harsh environment
- LFT-D Structure:
ultralight, consistent,recyclable and rigid
- Rubber and thermal insulation materials:
environmentally friendly
- Patented CAN control:
modular design, digital communication
- Compressor Brand:
VALEO, BITZER or BOCK



Drawing

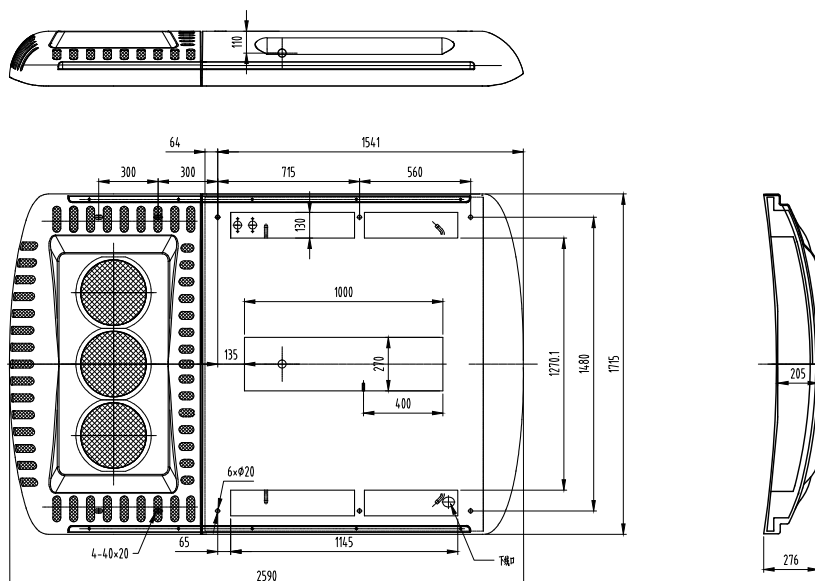

Van



City Bus



School Bus