

SDD-06

Compact Rooftop Bus A/C



Energy Saving



Safety



Light Weight



Comfortable



Recyclable



CAN system *

www.clingac.com

SDD-06




Technical Data

Cooling Capacity(kcal/h)	32000
Max Power Consumption (A)	100
Evaporator Airflow(m ³ /h)	8000(8pcs)
Condenser Airflow(m ³ /h)	10000(5pcs)
Compressor Displacement(CC)	647
Refrigerant	R134a
Weight(kg)	230
Size (mm) L*W*H	3000*2000*220
Application(m)	12-13m

- LFT-D structure: ultralight, recyclable
- Thermal insulation materials: anticorrosive, odorless and flame-retardant
- V type micro-channel heat exchanger optional: heat exchange surface increased 20%, cooling capacity 15% more
- Compact unit: 20% reduction in weight, heat exchange efficiency improved 20%, refrigerants charged 50% less



Drawing

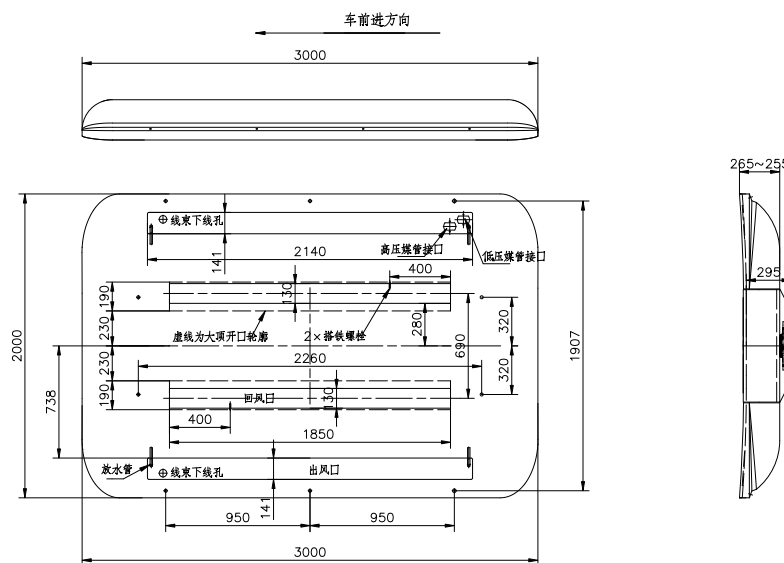

(Note: Size can be adjusted for different scenes)



Van



Double Decker Bus



City Bus



High Decker Bus



Intercity Bus



Shuttle Bus



Coach



School Bus