

Safety

Light Weight



Comfortable




Recyclable



Intelligent

www.clingac.com



ingac.com 🛛 🕓 +86

(+86 371 8533 5504


🙎 Zhengzhou, Henan ,China



Technical Data

		_
Cooling Capacity(kcal/h)	32000	The battery air conditioner and the vehicle air
Heating Capacity(kcal/h)	30000	conditioner is integrated, resulting into the cost reduction of 30% and the weight reduction of 20%.
Battery Cooling Capacity Driving/Charging (kW)	5/8	The requirements of air conditioning heating and battery cooling in low temperature environment are met.
Evaporator Airflow(m³/h)	6000(6Pcs)	
Condenser Airflow(m ³ /h)	10000(5Pcs)	Two-way electronic expansion valve is precisely regulated, coupled with PID intelligent control, and evenly distributes the cooling capacity inside the vehicle and battery side.
Refrigerant	R407C	
Weight(kg)	315	
Size(mm) L*W*H	3250*2000*260	IATF 16949 EMC III E-MARK
Application(M)	10-12	
	车辆前进方向	

Drawing

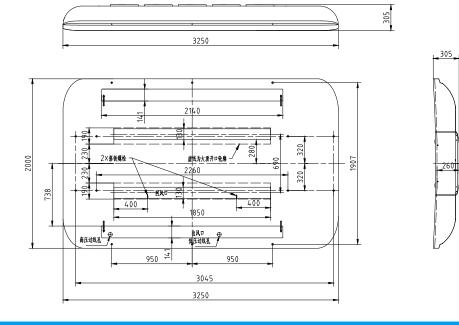















Var