


KLDS-03

Electric Convector



Energy Saving

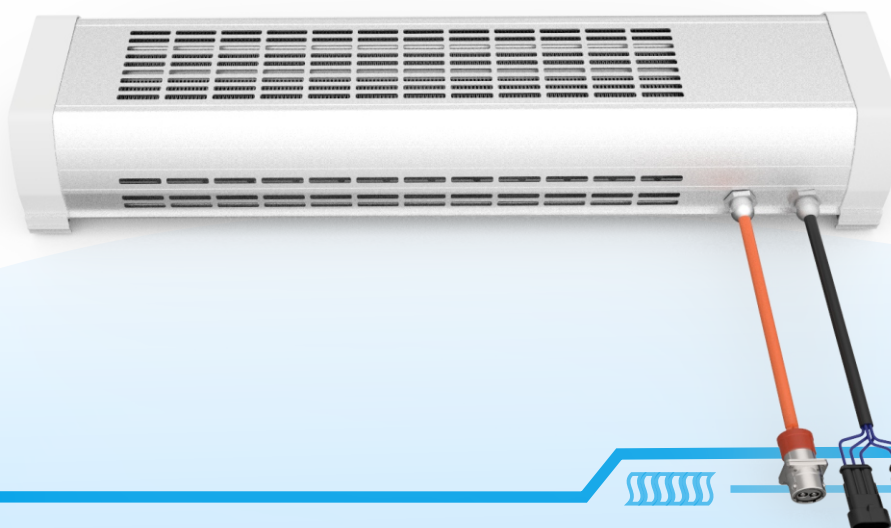

Safety



Light Weight



Comfortable



Recyclable



Intelligent

www.clingac.com



marketing@clingac.com



+86 371 85335504



Zhengzhou, Henan, China

KLDS-03



Technical Data

Heating(kW)	3
Airflow (m ³ /h)	325
Blower Power Consumption (W)	49
Blower (lifespan)	Brushless axil flow fan 20000h
Speed Mode	Two shift
Dimension (mm) L*W*H	666*178*103
Weight (kg)	6.2
Protection Grade	IP54 as a whole part (IP68 for high-voltage components), EMC-3
Applicable Models	6-12M

Quite&Comfy
Noise < 64dB, an enjoyable environment for passengers.

Pleasing Appearance
Stream line & round corner design, nice looking, easy installation.


Safe & Reliable
20000h long life span fans, IP68 high voltage protection, EMC grade 3, ground wire connection to guarantee safety.

Various Options
Various heating capacities available; various configurations for harness direction, fan speed, dimensions.

Bespoke Design
Airflow simulation analysis, specific designs for users habits.



Drawing

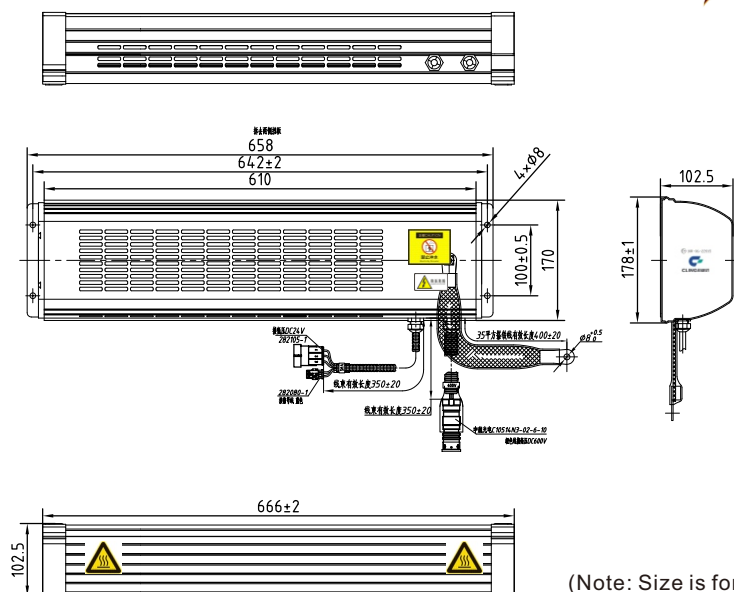

Van



Double Decker Bus



City Bus



High Decker Bus



Intercity Bus



Shuttle Bus



Coach



School Bus