


XDD-03



Compact Rooftop School Bus A/C

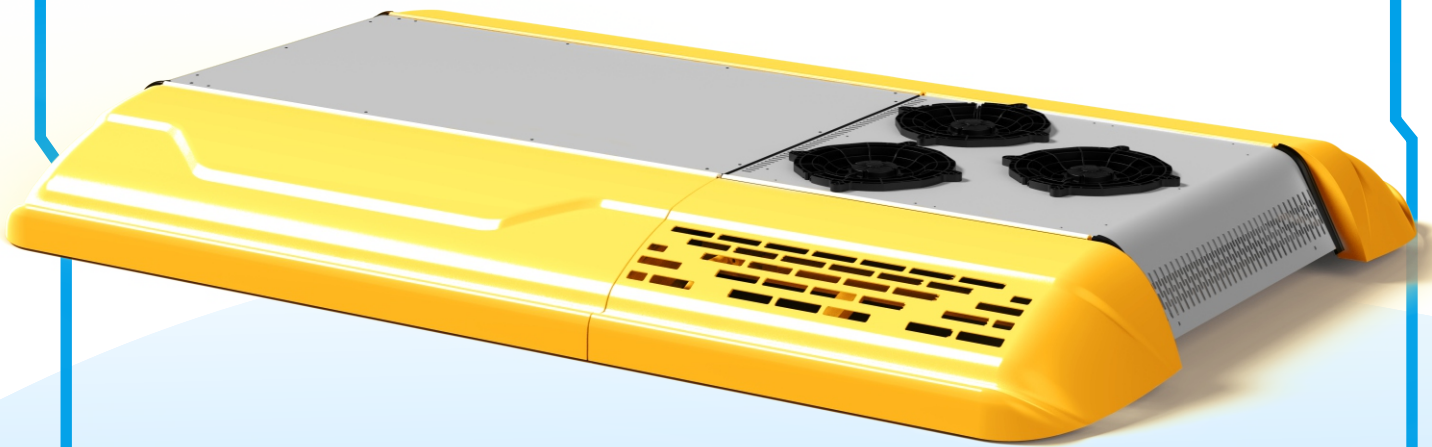

Lighter



Cooling



Heating



Ventilation




Fresh air



Low noise




Fast repair

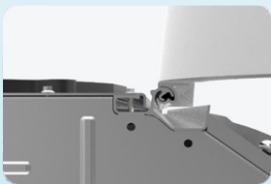

Profile flip structure



Standard fixing bracket

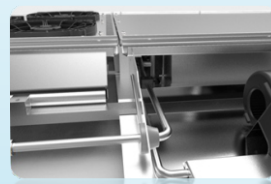

Glue-free structure



NVH noise test

XDD-03



Technical Data

| | |
|---------------------------------------|---------------|
| Cooling Capacity(kcal/h) | 20000 |
| Max Power Consumption(A) | 65 |
| Evaporator Airflow(m ³ /h) | 4000 |
| Condenser Airflow(m ³ /h) | 5400 |
| Compressor Displacement(CC) | 380/430 |
| Refrigerant | R134a |
| Weight(kg) | 140 |
| Size (mm) L*W*H | 2752*1848*220 |
| Application(M) | 8-10 |

Highly efficient microchannel heat transfer;


EMC performance meets the second level of the GB, avoiding electromagnetic radiation harmful to personnel and equipment;

Environmentally adaptive energy-saving speed-regulating fans;

Compact size, lightweighting, elegant appearance, excellent cost performance.



Installation Drawing

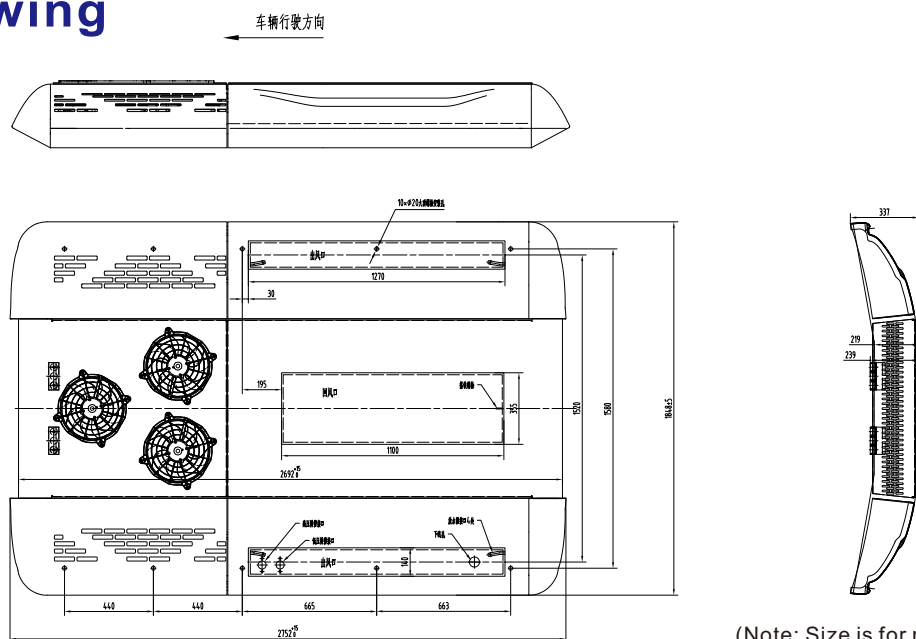

(Note: Size is for reference only)



Van



Double Decker Bus



City Bus



High Decker Bus



Intercity Bus



Shuttle Bus



Coach



School Bus