

XDD-04T



Compact Rooftop School Bus A/C



Lighter



Cooling



Heating



Ventilation




Fresh air



Low noise




Fast repair

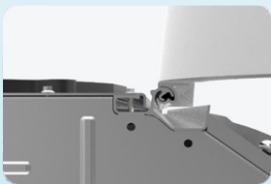

Profile flip structure



Standard fixing bracket



Glue-free structure



NVH noise test

XDD-04T




Technical Data

Cooling Capacity(kcal/h)	24000
Max Power Consumption(A)	65
Evaporator Airflow(m ³ /h)	4000
Condenser Airflow(m ³ /h)	5400
Compressor Displacement(CC)	430
Refrigerant	R134a
Weight(kg)	140
Size (mm) L*W*H	2752*1848*220
Application(M)	10-12

- Highly efficient microchannel heat transfer;
- EMC performance meets the second level of the GB, avoiding electromagnetic radiation harmful to personnel and equipment;
- Environmentally adaptive energy-saving speed-regulating fans;
- Compact size, lightweighting, elegant appearance, excellent cost performance.



Installation Drawing

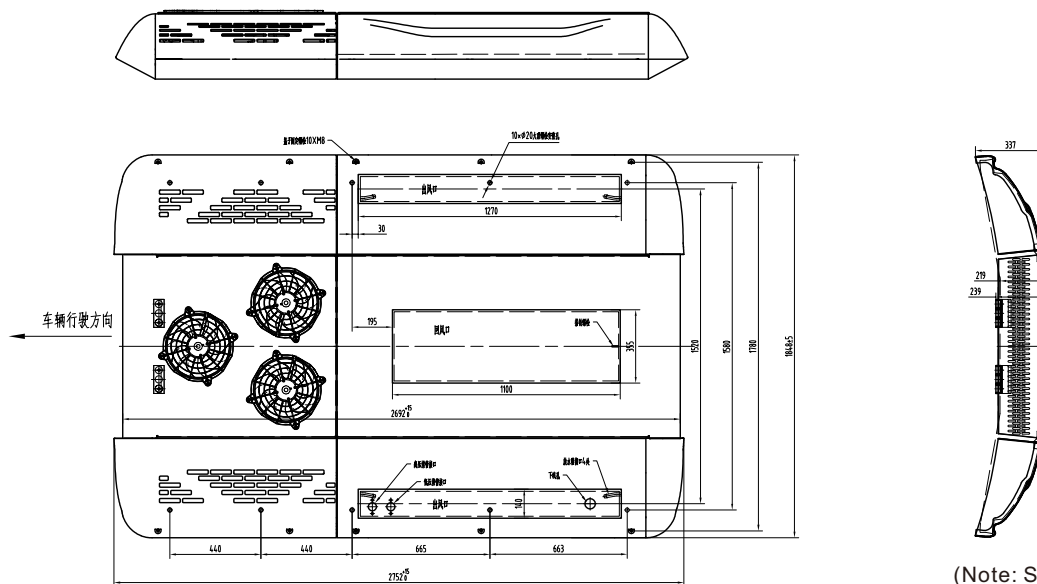

(Note: Size is for reference only)



Van



Double Decker Bus



City Bus



High Decker Bus



Intercity Bus



Shuttle Bus



Coach



School Bus